


## JETSTREAM CABLE BLOWING MACHINE

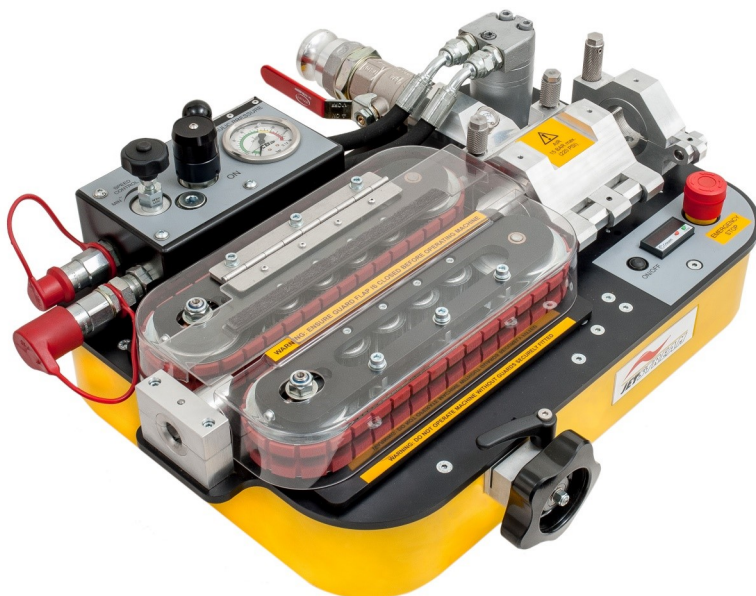


The C-1900 JetStream has been designed to provide maximum cable protection, combined with the performance and reliability of hydraulic drive. The profiled double drive belt system is driven by single 32cc hydraulic motor, powered by the proven C-1203-F power pack.

The electronic monitoring system provides read-out of speed and distance, gives protection against duct obstructions and includes emergency stop facility.

The C-1900 is adjustable to suit a wide range of cable diameters 4-20mm, and duct diameters 12-50mm.

### MAIN FEATURES

- ◆ Automatic Cable Centralisation
- ◆ Synchronous high grip profiled drive belts 
- ◆ Table top design
- ◆ Variable speed control
- ◆ Single person operation
- ◆ Digital cable speed and length monitoring
- ◆ Integral air valve and pressure gauge
- ◆ Easy cable threading
- ◆ Polycarbonate safety guarding
- ◆ Low maintenance
- ◆ Wheeled Travel case
- ◆ Tool kit

### SPECIFICATIONS

Cable Range	4-20mm
Duct Range	12-50mm
Cable Speed	85m/min
Pushing Force	600N
Maximum Air Pressure	15 Bar
Drive Media	Hydraulic
Drive Type	Profiled Belt
Drive Orientation	Horizontal
Cable Speed Measurement	Proximity Switch
Length	700mm
Width	590mm
Height	550mm
Weight	60kg

### ORDERING INFORMATION

C-1900      JetStream Cable Blowing Machine

## JETSTREAM CONFIGURATION

In order to configure your JetStream to your application, we ask that you pick one of each from the list below, the cable collet assembly (A), the duct clamp and seal collets (B) and cable seals (C).




### A. CABLE COLLET ASSEMBLY

C-1900-C-0406	4-6mm Cable Diameter
C-1900-C-0609	6-9mm Cable Diameter
C-1900-C-0912	9-12mm Cable Diameter
C-1900-C-1216	12-16mm Cable Diameter
C-1900-C-1620	16-20mm Cable Diameter



### B. DUCT CLAMP & SEAL COLLET

C-1900-D-12	12mm Duct Outside Diameter
C-1900-D-14	14mm Duct Outside Diameter
C-1900-D-16	16mm Duct Outside Diameter
C-1900-D-18	18mm Duct Outside Diameter
C-1900-D-25	25mm Duct Outside Diameter
C-1900-D-32	32mm Duct Outside Diameter
C-1900-D-40	40mm Duct Outside Diameter
C-1900-D-50	50mm Duct Outside Diameter

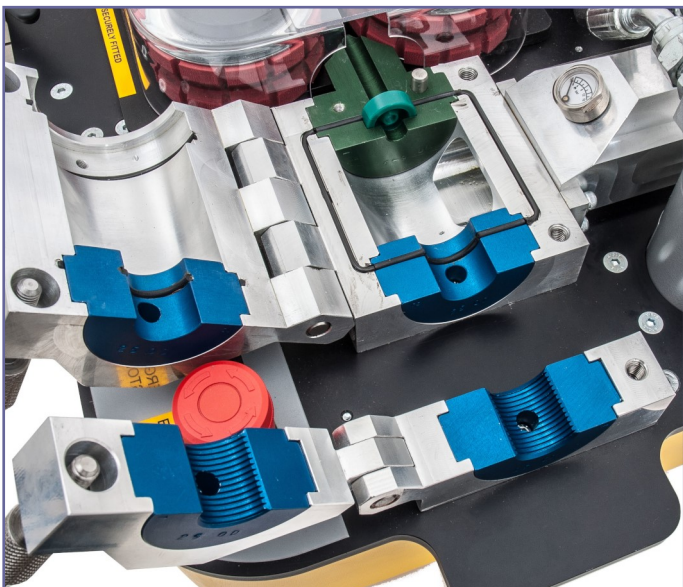

**C. CABLE SEALS (10 PACK)**


C-1255-0208-04-05	4-5mm Cable Diameter
C-1255-0208-05-06-1	5-6mm Cable Diameter
C-1255-0208-06-07.5	6-7.5mm Cable Diameter
C-1255-0208-07.5-09	7.5-9mm Cable Diameter
C-1255-0208-09-10.5	9-10.5mm Cable Diameter
C-1255-0208-10.5-12	10.5-12mm Cable Diameter
C-1255-0208-12-14-F	12-14mm Cable Diameter
C-1255-0208-14-16-F	14-16mm Cable Diameter
C-1255-0208-16-18-F	16-18mm Cable Diameter
C-1255-0208-18-20-F	18-20mm Cable Diameter

**D. CABLE SEAL PLUG**

C-1256-0206-05	4-5mm Cable Diameter
C-1256-0206-06	5-6mm Cable Diameter
C-1256-0206-07.5	6-7.5mm Cable Diameter
C-1256-0206-09	7.5-9mm Cable Diameter
C-1256-0206-10.5	9-10.5mm Cable Diameter
C-1256-0206-12	10.5-12mm Cable Diameter
C-1256-0206-14	12-14mm Cable Diameter
C-1256-0206-16	14-16mm Cable Diameter
C-1256-0206-18	16-18mm Cable Diameter
C-1256-0206-20	18-20mm Cable Diameter

**TUBE SEAL O RINGS****ORDERING INFORMATION**

C-1300-TS-12-5	12mm Seal O Rings
C-1300-TS-14-5	14mm Seal O Rings
C-1300-TS-16-5	16mm Seal O Rings
C-1300-TS-18-5	18mm Seal O Rings

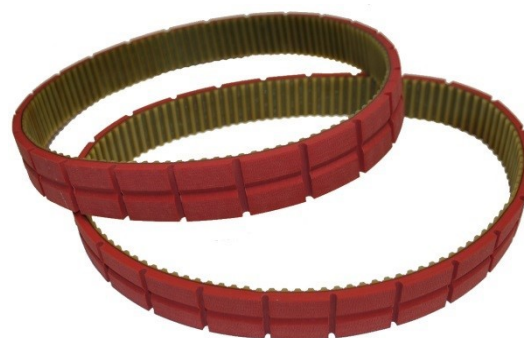**DRIVE BELTS****ORDERING INFORMATION**

C-1900-DB	6-20mm Drive Belts
C-1900-DB-1	4-16mm Drive Belts